



26埠10/100/1000Mbps智慧型PoE交換器

型號. SP6526P




產品介紹

Micronet SP6526P為26埠10/100/1000Mbps智慧型PoE交換器,此交換器具24埠10/100/1000Mbps網路埠及2埠mini-GBIC,並支援IEEE802.3af/at乙太網路供電標準,提供每埠最高15.4W(24埠同時)或單埠最高30W的電力,整機最高總供電量可達370W。為了因應各種不同的應用環境,SP6526P提供高效能的智慧管理功能,優化企業的網路架構,進而減少網路中斷,加強網路安全,並且提供更高效能的網路環境,滿足日趨增加的網路連線需求。

特色

- 具備具24埠10/100/1000Mbps網路埠及2埠mini-GBIC
- 支援IEEE 802.3af/at 乙太網路供電標準, PoE供電最高達370瓦
- 支援IEEE 802.1X 通訊埠認證
- 支援QoS (IEEE 802.1p/1Q) 和TOS/DiffServ提高資料傳送確定性
- 具備Layer2群播IGMP(V1, V2)
- 符合IEEE 802.3ad LACP網路埠聚集可將頻寬使用率最佳化
- 支援IEEE 802.1Q tag-based VLAN及以連接埠為基礎的虛擬網路
- 支持廣播風暴抑制
- 支持設備管理DHCP client
- 支持網路管理SNMP v1/v2/v3
- 支持Port Mirroring用於線上除錯
- 具備時間排程PoE
- 支援SSL和SSH加密管理
- 符合IEEE 802.3az標準,能自動依據設備開機與否及系統休眠來調整電能的損耗,節能省碳

應用範例

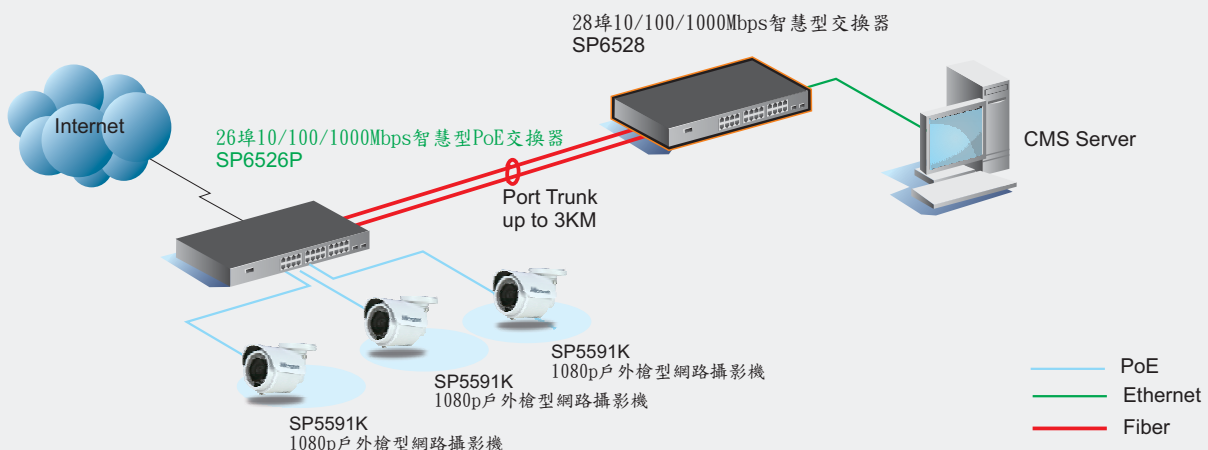

標準和規格

型號	SP6526P	
標準	IEEE802.3, 10Base-T IEEE802.3u, 100Base-TX/FX IEEE802.3ab, 1000Base-T	IEEE802.3z, 1000Base-SX/LX IEEE802.3az, Green Saving IEEE802.3af, 802.3at, PoE
介面	24 x 10/100/1000M RJ45 Ports 2 x 1G SFP Slots	
硬體效能	Min. MIPS(MHZ)-RTL8382M 500MHZ, Flash Memory/DRAM/Packet Buffer(MB):32/128/0.5125 Buffer Memory: 0.5125MB, Mac address:8K Jumbo Frame: 9216K Switching Capacity: 52Gbps, Forwarding Rate:38.68 Mpps	
L2功能	Auto Negotiation, Auto MDI/MDI-X, Back-Pressure for halfduplex mode IEEE802.3x, Flow Control IEEE802.3ad, Link Aggregation(LACP) Port Trunk (Static Link Aggregation) Protocol-based VLAN, Voice VLAN VLAN port isolation (PVE) IEEE802.1q, Tag-based VLAN, Q-in-Q (double tag) VLAN IGMP Snooping v1/v2, IGMP Querier/Proxy IEEE802.1d, STP, IEEE802.1w, RSTP, IEEE802.1s, MSTP MLD v1/v2 snooping, MVR DHCP L2 relay (Option 82)	
品質服務	Priority Queues:8 Hardware Strict Port Priority Traffic classification based on IEEE 802.1p CoS, DSCP Supports WRR	
安全保護	IP Source Guard, RADIUS, TACACS+ Supports IEEE802.1x and MAC-based Authentication Mac Address/IP Filtering DHCP Snooping Storm Control, Loop Protection	
PoE管理功能	Port Configuration PoE Scheduling Auto-checking Power Delay	
管理介面	Cable Diagnostics, DHCP L2 relay (Option 82) Firmware Upgradable and down gradable via TFTP/HTTP Supports LLDP (IEEE802.1ab) SNMP(V1/V2/V3), RMON (groups 1, 2, 3, and 9) Port mirroring: one to one and many to one Event log: syslog Loop detection and prevention, UPnP Dual Image HTTPS/SSL/SSH Device Management System (DMS)-Graphical Monitoring/Traffic Monitoring/Trouble Shooting IPv6 Management	
環境溫溼度	Operating: 0~50°C, Storage: -20~70°C Operating: 10~90% (Non-Condensing)	
電源	AC power 100 to 240 V, PoE power budget max. 370 watts	
尺寸大小	442 x 211 x 44 mm (W X D X H)	
重量	3.13kg	
認證	CE	


產品規格以實際出貨為準，如有異動恕不另行通知

訂單資訊

型號	敘述
SP6526P	26埠10/100/1000Mbps智慧型PoE交換器
M363A	1000Base-SX SFP Transceiver, 550M
M363B-X	1000Base-LX SFP Transceiver, X=10/20/40 KM

Micronet Communications Inc.

E-mail: sales@micronet.com.tw; support@micronet.com.tw WEB: www.micronet.com.tw

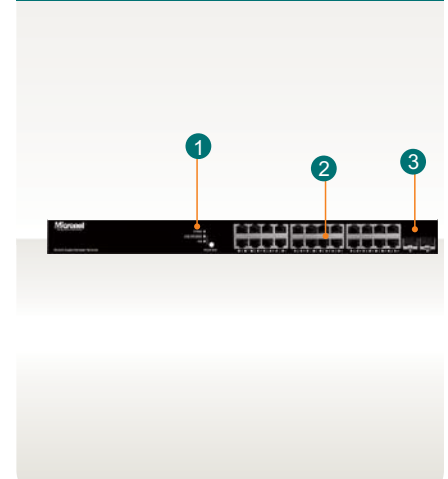

26埠10/100/1000Mbps智慧型PoE交換器

型號: SP6526P

- ① LED燈號狀態指示
- ② Gigabit RJ-45/PoE連接埠
- ③ 光纖埠

COMPANION PRODUCTS

Consider the following Micronet products as a factor in your network planning.

Ethernet and PoE

Wireless LAN

Broadband · ADS & VDSL

Network Video Surveillance

Network / Server / Appliance

Network / Structured Cabling

Copyright 2015 Micronet Communications Inc.
All technical information in this document is subject to change without prior notice. Micronet, EtherFast and MicroView are registered trademarks of Micronet Communications Inc. All other trademarks and registered trademarks are properties of their respective holders.

Distributed By :

